

FRECON

SP200

Solar Hybrid Inverter




FRECON ELECTRIC (SHENZHEN) CO.,LTD

SP200 Solar Hybrid Inverter


Features

- Dual output terminals
- Max. PV input voltage up to 500 V
- Configurable priority between grid and PV
- Supports lithium battery activation function
- Standard Wi-Fi module for mobile APP monitoring
- Support PV feed in to grid (but subject to local policies)
- Supports parallel operation of up to 9 units; three or more units can form a three-phase 380 VAC output


Solar System Connection

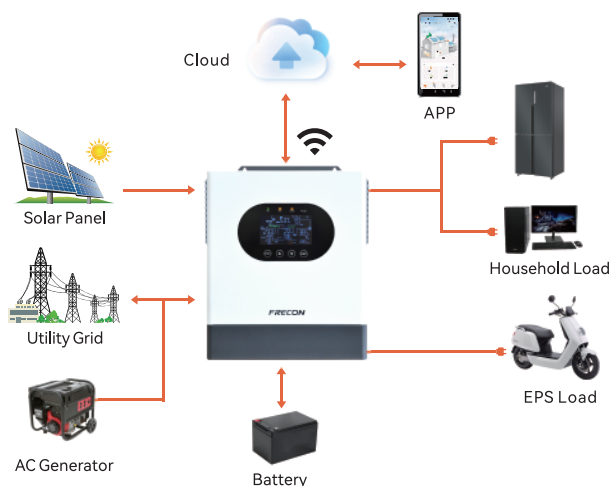


Support Operation Without Battery

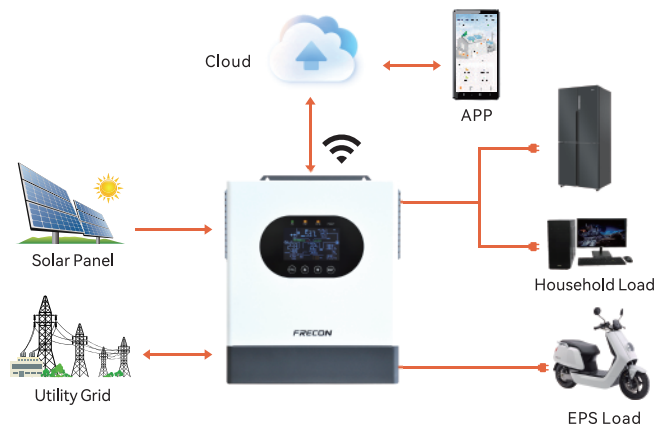

Three-Phase Parallel Output System

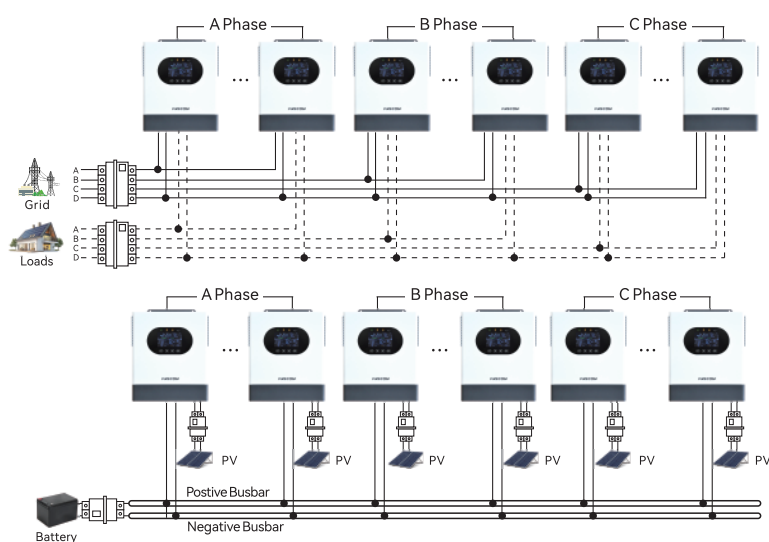

Single-Phase Parallel Output System

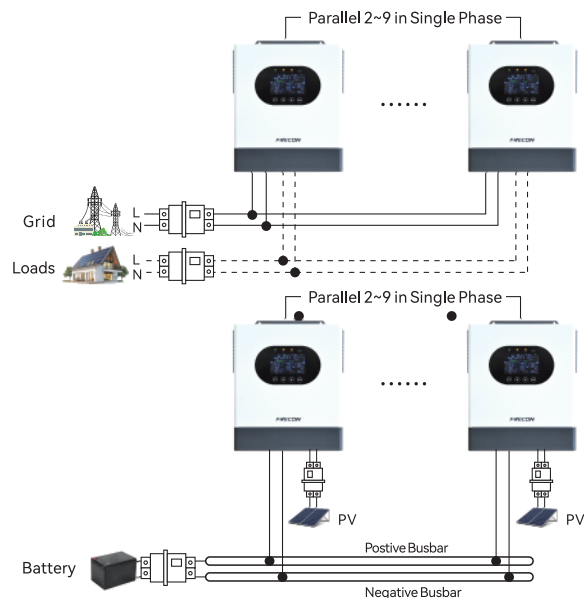

Model	SP200-6500-48	SP200-12000-48
Battery		
Battery Voltage	48VDC	
Battery Type	Lithium/Lead-acid Battery	
Max.PV Charge Current	120A	160A
Max.AC Charge Current	120A	160A
Max. Hybrid Charge Current	120A	160A
AC Output		
Rated Capacity	6500VA/6500W	12000VA/12000W
Surge Power	12000VA	24000VA
Wave Form	Pure Sine Wave	
Voltage	208VAC/220VAC/230VAC/240VAC	220VAC/230VAC/240VAC
No.Of AC Output	2	
Frequency	50 Hz/60 Hz	
Switch Time	10 ms(APP/UPS Mode)/20 ms(GEN Mode)	
Max.Efficiency(Battery Mode)	94%	
Parallel Quantity	1~9 Units (3 or more units in parallel can form a three-phase output)	1~6 Units (3 or more units in parallel can form a three-phase output)
Solar Input		
No.Of MPPT	1	2
Max. Input Power	9000W	15000W
Max.Open Circuit Voltage	500VDC	
Max.Input Current	27A	22.5A+22.5A/Single PV Input 27A
MPPT Voltage Range	60~450VDC	
PV Start-up Voltage	80VDC	
AC Input		
Rated Input Voltage	230VAC	
Input Voltage Range	90~280VAC(APP/GEN Mode)/170~264VAC(UPS Mode)	
Input Frequency Range	50Hz/60Hz (Auto Adaptive)	
General Data		
HMI	LCD	
Interface	BMS(CAN/RS485)/RS232 /Parallel interface	
External Module	Wi-Fi	
Ingress Protection	IP21	
Operation Temperature	-10~60℃	
Storage Temperature	-15~60℃	
Relative Humidity	5%~95%(Non-condensing)	
Max.Operation Altitude	4000m(Derating above 2000m)	
Certificate	RoHS/CE	
Dimensions(H*W*D)	411*343*134mm	516*422*134mm
Net Weight	8.3kg	14.6kg



FRECON ELECTRIC (SHENZHEN) CO., LTD

Add: F15, Building 3, Huidongsheng Industrial Park, 1028
Guangqiao Road, Guangming District, Shenzhen

Tel: 0755-88605930

E-Mail: overseas@frecon.com.cn

www.frecon-inverter.com



Website



Facebook